



COMMERCIAL CONSTRUCTION PROJECT IN STANFORD LE HOPE FOR GOLDBECK CONSTRUCTION LTD

Project Description

Construction of 13,000m² / 140,000ft² distribution unit

Client: **Goldbeck Construction Ltd**


Start date: **January 2023**

Completion Date: **July 2023**


Value **£2.4m**

Project Details

- 4m Deep drainage with a number of large diameter oil separators and rainwater harvesting tanks
- 16m Culvert waterway diversion
- Foul water treatment plant to process all on site foul water ready to discharge into local water course
- Precast pile solution with Pad foundations, reinforced lift pit bases and dock levellers
- 2000m² power float suspended metal deck slab
- 1400nr reinforced flared mushroom pile caps supporting suspended ground floor slab
- 7500m² of brushed finish concrete service yard slab

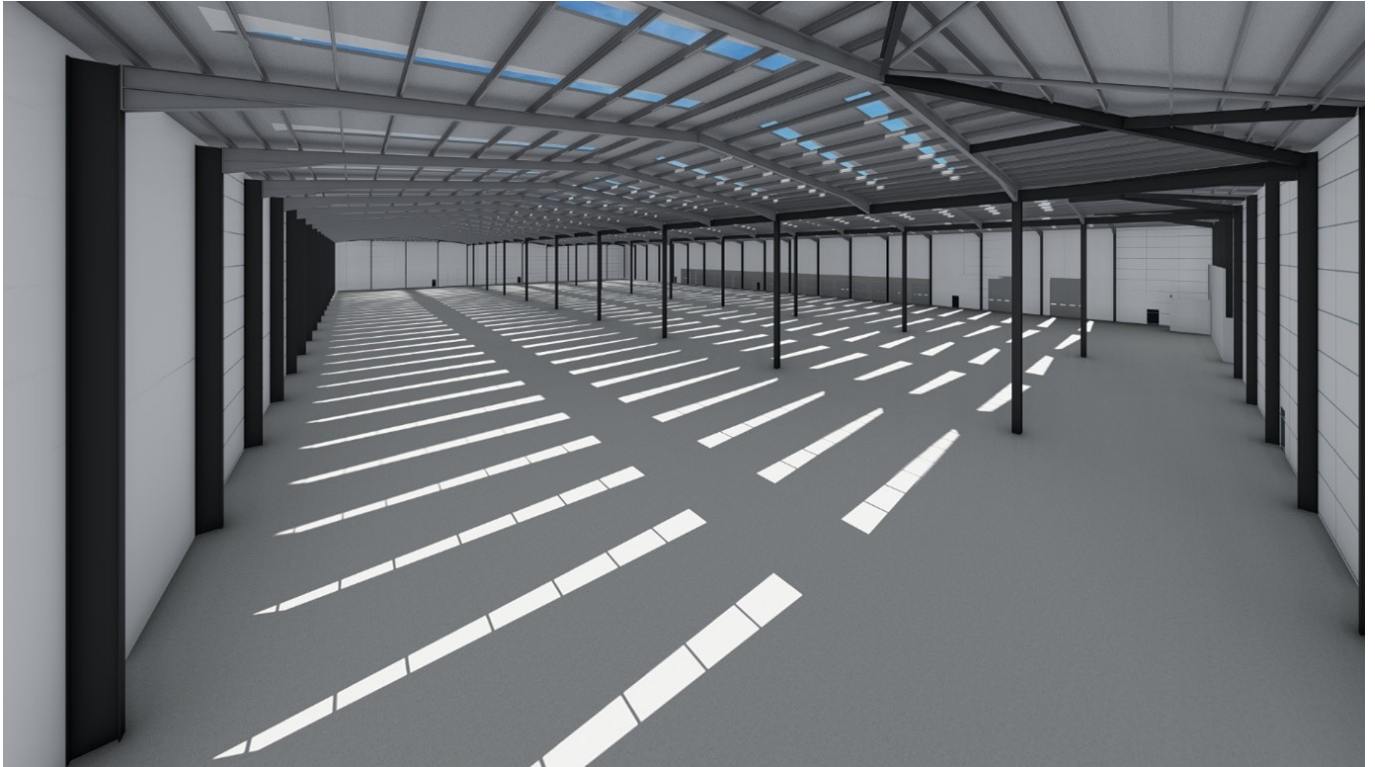

Commercial Construction Project in Stanford Le Hope for Goldbeck Construction Ltd

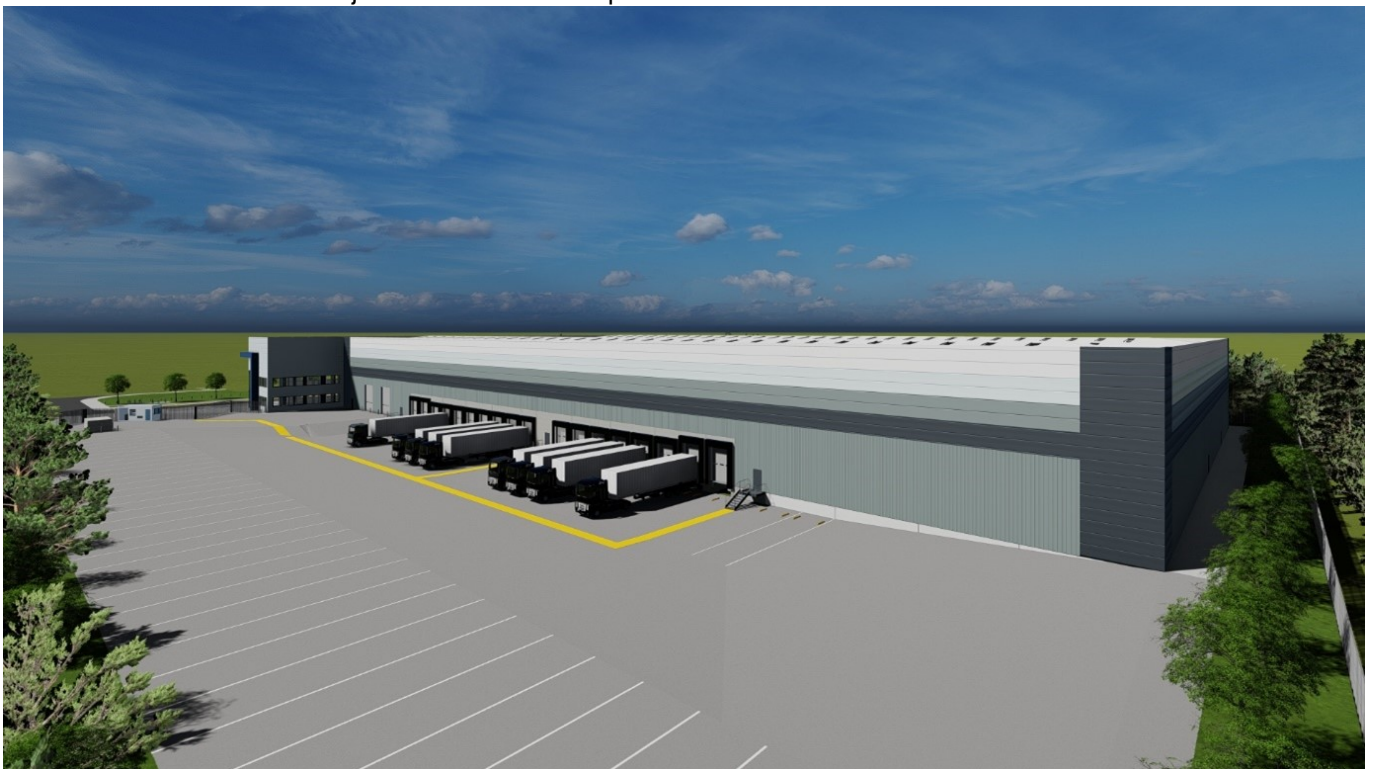

Commercial Construction Project in Stanford Le Hope for Goldbeck Construction Ltd